

- For more records, click the Records link at page end.
- To change the format of selected records, select format and click **Display Selected**.
- To print/save clean copies of selected records from browser click **Print/Save Selected**.
- To have records sent as hardcopy or via email, click **Send Results**.

<input checked="" type="checkbox"/> Select All	<b>Format</b>
<input checked="" type="checkbox"/> Clear Selections	Display Selected <b>Full</b> 

# 1. ☒ 7/19/1

011825483      \*\*Image available\*\*  
 WPI Acc No: 1998-242393/199822  
 XRAM Acc No: C98-075672  
 XRPX Acc No: N98-191879

**Process and apparatus for coating surgical sutures - by  
 contacting suture with coating mixture, removing excess coating from  
 suture and drying**

Patent Assignee: ETHICON INC (ETHI ); JOHNSON & JOHNSON RES PTY LTD (JOHJ  
 ); JOHNSON & JOHNSON (JOHJ ); AGARWAL V (AGAR-I); LABRECQUE S K (LABR-I)  
 ; POKROPINSKI H (POKR-I)

Inventor: AGARWAL V; LABRECQUE S L; POKROPINSKI H; LABRECQUE S K

Number of Countries: 028 Number of Patents: 008

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Week
<u>EP 839542</u>	A2	19980506	EP 97308702	A	19971030	199822 B
AU 9741872	A	19980507	AU 9741872	A	19971016	199830
JP 10151186	A	19980609	JP 97311018	A	19971028	199833
CA 2219570	A	19980430	CA 2219570	A	19971029	199836
US 5817129	A	19981006	US 96741842	A	19961031	199847
BR 9705183	A	19990706	BR 975183	A	19971030	199938
AU 720720	B	20000608	AU 9741872	A	19971016	200035
US 6187095	B1	20010213	US 96741842	A	19961031	200111
			US 9873093	A	19980505	

Priority Applications (No Type Date): US 96741842 A 19961031; US 9873093 A  
 19980505

Patent Details:

Patent No	Kind	Lan	Pg	Main IPC	Filing Notes
-----------	------	-----	----	----------	--------------

EP 839542	A2	E	11	A61L-017/00	
-----------	----	---	----	-------------	--

Designated States (Regional): AL AT BE CH DE DK ES FI FR GB GR IE IT LI  
 LT LU LV MC NL PT RO SE SI

AU 9741872	A	B05C-003/12
------------	---	-------------

JP 10151186	A	10 A61L-017/00
-------------	---	----------------

CA 2219570	A	A61L-017/00
------------	---	-------------

US 5817129	A	A61B-017/04
------------	---	-------------

BR 9705183	A	A61L-017/00
------------	---	-------------

AU 720720	B	B05C-003/12	Previous Publ. patent AU 9741872
-----------	---	-------------	----------------------------------

US 6187095	B1	B05C-011/02	Div ex application US 96741842
------------	----	-------------	--------------------------------

			Div ex patent US 5817129
--	--	--	--------------------------

Abstract (Basic): EP 839542 A

A continuous process for coating sutures comprises: (a) contacting a suture with a coating mixture; (b) removing the wet coated suture from the coating mixture and preventing at least part of the excess coating mixture on the suture from contacting the initial coating mixture (thus maintaining the initial coating mixture at a constant concentration); and (c) drying the suture. Also claimed are: (i) a suture coating apparatus comprising a vessel containing the coating mixture having an opening for passing at least 1 suture through; a guide means (GM) (1) for directing the suture into the coating mixture;




a GM (2) for directing the suture out of the mixture; and a GM (3) which either directs the suture through a sharp turn to remove excess coating, or has a surface which is adjacent to or contacts the suture and forms a meniscus to remove excess coating; and (ii) a suture coating head comprising a vessel containing coating mixture, having an opening for passing a suture through; a GM (1) positioned in the vessel for directing a suture from a vertical downward path to a vertical upward path; and a fluid impermeable diverter to control fluid communications from a suture as the suture exits the vessel.

USE - The coatings can be applied to any suture material, particularly synthetic absorbable multifilament sutures.

Dwg.2/4



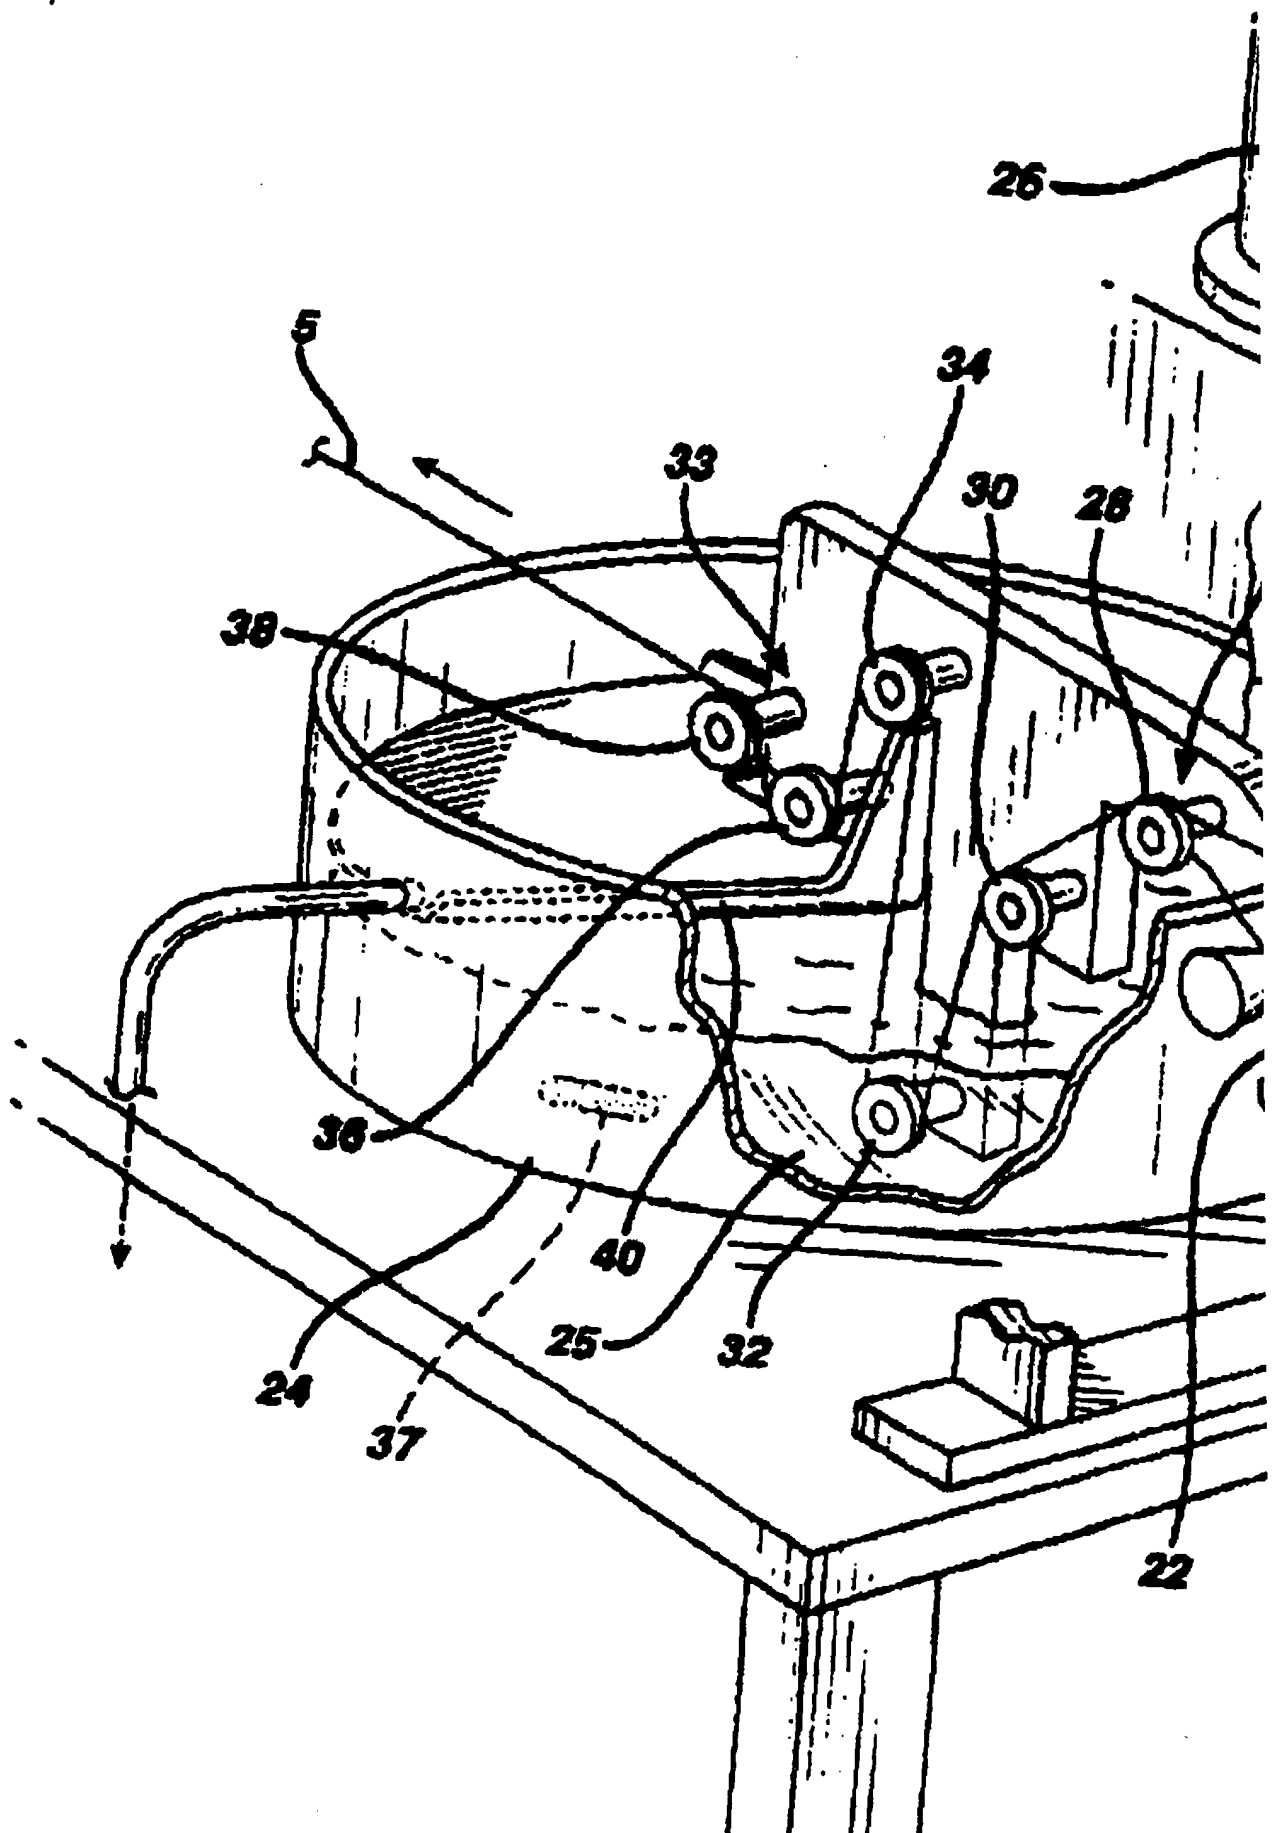



Title Terms: PROCESS; APPARATUS; COATING; SURGICAL; SUTURE; CONTACT; SUTURE  
; COATING; MIXTURE; REMOVE; EXCESS; COATING; SUTURE; DRY

Derwent Class: A11; A14; A23; A25; A96; B07; D22; F02; G02; P31; P34; P42

International Patent Class (Main): A61B-017/04; A61L-017/00; B05C-003/12;  
B05C-011/02

International Patent Class (Additional): B05C-003/152; B05C-003/172;  
B05D-001/18; B05D-001/36; B05D-007/24; D02G-003/44; D02J-003/00;  
D06B-003/04; D06M-015/00

File Segment: CPI; EngPI

Manual Codes (CPI/A-N): A11-B05; A12-V03; B04-B01C2; B04-C02A; B04-C02D;  
B04-C03; B04-N02; B11-C04; D09-D; F01-E; F03-E01; F04-E04; G02-A05

Chemical Fragment Codes (M1):

- \*01\* H7 H714 H721 J0 J011 J3 J371 M210 M212 M262 M281 M320 M416 M423 M424  
M430 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322 Q333 R042 V743  
R00444-M R00444-Q
- \*02\* H7 H714 H721 J0 J011 J1 J171 M210 M212 M262 M281 M320 M416 M423 M424  
M430 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322 Q333 R042 V743  
R00446-M R00446-Q
- \*03\* F012 F130 J5 J521 L9 L942 M280 M320 M413 M423 M424 M430 M510 M521  
M530 M540 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322 Q333 R042  
V743 R01295-M R01295-Q 00357
- \*04\* F012 F163 J5 J521 L9 L942 M280 M320 M413 M423 M424 M430 M510 M521  
M530 M540 M740 M782 M903 M904 N105 Q110 Q130 Q322 Q333 R042 V743  
R22419-M R22419-Q 00357 00263
- \*05\* F012 F170 J5 J521 L9 L942 M280 M320 M413 M423 M424 M430 M510 M521  
M530 M540 M740 M782 M903 M904 N105 Q110 Q130 Q322 Q333 R042 V743  
R22417-M R22417-Q 00357 00263 00351
- \*06\* F012 F013 F015 F016 F163 J5 J522 L9 L942 L999 M210 M211 M240 M282  
M320 M413 M423 M424 M430 M510 M521 M530 M540 M740 M782 M903 M904  
N105 Q110 Q130 Q322 Q333 R042 V743 R10252-M R10252-Q 00357 00263  
00351
- \*07\* F012 F013 F015 F016 F163 J5 J522 L9 L942 L999 M210 M211 M240 M282  
M320 M413 M423 M424 M430 M510 M521 M530 M540 M740 M782 M903 M904  
N105 Q110 Q130 Q322 Q333 R042 V743 R10253-M R10253-Q 00357 00263  
00351
- \*08\* H721 H722 H723 J0 J013 J2 J273 M225 M226 M231 M232 M233 M262 M283  
M313 M321 M332 M343 M383 M391 M416 M423 M424 M430 M620 M740 M782  
M903 M904 N105 Q110 Q130 Q322 Q333 R042 V743 R90112-M R90112-Q 00357  
00263 00351
- \*09\* H7 H713 H721 J0 J011 J2 J271 M210 M211 M212 M262 M272 M281 M320 M416  
M423 M424 M430 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322 Q333  
R042 V743 R00835-M R00835-Q 00357 00263 00351
- \*10\* H4 H401 H481 H7 H713 H721 H8 M210 M212 M272 M281 M320 M423 M424 M430  
M510 M520 M530 M540 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322  
Q333 R042 V743 R21380-M R21380-Q 00357 00263 00351
- \*11\* M423 M424 M430 M740 M782 M903 M904 M910 N105 Q110 Q130 Q322 Q333  
R042 V711 R01852-M 00357 00263 00351
- \*12\* M423 M424 M430 M740 M782 M903 M904 N105 Q110 Q130 Q322 Q333 R042  
V752 R24034-M 00357 00263 00351
- \*13\* J0 J011 J1 J111 K0 L8 L815 L816 L831 L832 M423 M424 M430 M740 M782  
M903 M904 N105 Q110 Q130 Q322 Q333 R042 V735 R24069-M 00357 00263  
00351
- \*14\* M423 M424 M430 M740 M782 M903 M904 N105 Q110 Q130 Q322 Q333 R042  
V751 R24033-M 00357 00263 00351
- \*15\* J0 J011 J1 J111 K0 L8 L815 L816 L831 L832 M423 M424 M430 M740 M782  
M903 M904 N105 Q110 Q130 Q322 Q333 R042 V735 R03104-M 00357 00263  
00351
- \*16\* J0 J011 J1 J111 K0 L8 L811 L814 L815 L817 L831 L832 M423 M424 M430





M740 M782 M903 M904 N105 Q110 Q130 Q322 Q333 R042 V735 R24037-M  
00357 00263 00351

\*17\* H4 H402 H482 H5 H589 H8 M280 M312 M323 M332 M342 M383 M393 M423 M424  
M430 M510 M520 M530 M540 M620 M740 M782 M903 M904 M910 N105 Q110  
Q130 Q322 Q333 R042 V743 R02044-M 00357 00263 00351

\*18\* K0 L8 L814 L816 L831 L832 M423 M424 M430 M740 M782 M903 M904 N105  
Q110 Q130 Q322 Q333 R042 V735 R16377-M 00357 00263 00351

Chemical Fragment Codes (M6):

\*19\* M903 Q110 Q130 Q322 Q333 R042 R120 00357 00263 00351

Polymer Indexing (PS):

<01>

\*001\* 018; P1707 P1694 D01

\*002\* 018; R24033 G3714 P0599 D01 F70

\*003\* 018; R00444 G0453 G0260 G0022 D01 D12 D10 D26 D51 D53 D58 D83 F70  
F93; H0000; P0088

\*004\* 018; R24034 G3714 P0599 D01 F70

\*005\* 018; G2062-R D01 D60 F07 F35; P0635-R F70 D01; H0000

\*006\* 018; R00351 G1558 D01 D23 D22 D31 D42 D50 D73 D82 F47; P0975-R  
P0964 F34 D01 D10; H0000; H0011-R; P0055

\*007\* 018; G4068 G2131 D01 D10 D11 D22 D23 D32 D46 D50 D76 D86 F43;  
R17298 G2131 D01 D23 D22 D31 D46 D50 D84 F43; R01295 G2131 D01 D23  
D22 D31 D42 D50 D77 D86 F43; G2142 G2131 D01 F43 D23 D22 D31 D76  
D46 D50 D84 F34; R00844 G1296 D01 D11 D10 D23 D22 D31 D46 D50 D63  
D75 D84 F44; G1309 G1296 D01 D63 F44 D11 D10 D23 D22 D31 D74 D46  
D50 D83; P1978-R P0839 D01 D50 D63 F41; P0055; H0000; H0011-R

\*008\* 018; R00835 G0566 G0022 D01 D11 D10 D12 D51 D53 D58 D63 D84 F41 F89  
; G0022-R D01 D51 D53 D60 F35-R; H0011-R

\*009\* 018; G2142 G2131 D01 F43 D23 D22 D31 D76 D46 D50 D84 F34; D11 D10  
D50 E10 E00; P1978-R P0839 D01 D50 D63 F41; P0055; H0011-R

\*010\* 018; ND07; ND05; J9999 J2915-R; K9416; Q9999 Q7114-R; N9999 N7147  
N7034 N7023; K9676-R; K9483-R; N9999 N6780-R N6655; B9999 B4488  
B4466; Q9999 Q8026 Q7987; Q9999 Q8059 Q7987

<02>

\*001\* 018; G3634-R D01 D03 D11 D10 D23 D22 D31 D42 D76 F24 F34 H0293  
P0599 G3623

\*002\* 018; ND07; ND05; J9999 J2915-R; K9416; Q9999 Q7114-R; N9999 N7147  
N7034 N7023; K9676-R; K9483-R; N9999 N6780-R N6655; B9999 B4488  
B4466; Q9999 Q8026 Q7987; Q9999 Q8059 Q7987

\*003\* 018; B9999 B3521-R B3510 B3372; B9999 B3430 B3372

Ring Index Numbers: ; 00357; 00263; 00351; 00263; 00263

Derwent Registry Numbers: 0444-S; 0444-U; 0446-S; 0446-U; 0835-S; 0835-U;  
1295-S; 1295-U; 1842-S; 1842-U; 1852-U; 2044-U

Specific Compound Numbers: R00444-M; R00444-Q; R00446-M; R00446-Q; R01295-M  
; R01295-Q; R22419-M; R22419-Q; R22417-M; R22417-Q; R10252-M; R10252-Q;  
R10253-M; R10253-Q; R90112-M; R90112-Q; R00835-M; R00835-Q; R21380-M;  
R21380-Q; R01852-M; R24034-M; R24069-M; R24033-M; R03104-M; R24037-M;  
R02044-M; R16377-M

Derwent WPI (Dialog® File 351): (c) 2002 Derwent Info Ltd. All rights reserved.

<input checked="" type="checkbox"/> Select All	<input type="checkbox"/> Display Selected	<b>Format</b>
<input checked="" type="checkbox"/> Clear Selections	Print/Save Selected	Full 
Send Results		


© 2002 The Dialog Corporation plc



(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 839 542 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
06.05.1998 Bulletin 1998/19

(51) Int Cl.<sup>6</sup>: **A61L 17/00**

(21) Application number: **97308702.6**

(22) Date of filing: **30.10.1997**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE**  
Designated Extension States:  
**AL LT LV RO SI**

(30) Priority: **31.10.1996 US 741842**

(71) Applicant: **Ethicon, Inc.**  
**Somerville, NJ 09976 (US)**

(72) Inventors:  
• **Labrecque, Samuel L.**  
**Gainesville, GA 30506 (US)**  
• **Agarwal, Vishvaroop**  
**Piscataway, NJ 08828 (US)**  
• **Pokropinski, Henry**  
**Helmetta, NJ 08828 (US)**

(74) Representative: **Mercer, Christopher Paul et al**  
**Carpmaels & Ransford**  
**43, Bloomsbury Square**  
**London WC1A 2RA (GB)**

(54) **Process and apparatus for coating surgical sutures**

(57) The present invention provides a process and apparatus for coating sutures.

US 5817129  
6187095

**EP 0 839 542 A2**

## Description

### Field of the Invention

This invention relates to a process for coating surgical ligatures such as sutures and an apparatus for coating surgical ligatures.

### Background of the Invention

Sutures are generally coated with a lubricious coating to improve the tie down and knot adjustability of the suture. Additionally, these coatings may also reduce the drag associated with passing the suture through the tissue thereby reducing the tissue trauma.

The coatings that are applied to sutures generally contain a biocompatible polymer and optionally other additives such as, fatty acid salts or esters may be added into the coating to further improve the lubricity of the coated sutures. These coatings are usually dissolved or suspended in a volatile organic liquid and applied in the form of a liquid coating to the sutures. Conventionally these liquid coatings have been applied by dip coating, bushing, wiping, drip coating, spray coating or by using a coating/filling head. Sutures can be dip coated in a batch process by winding a suture on a frame and immersing the frame into a coating solution or in a continuous process in which the suture is passed under tension into a dip tank then through a drying tunnel (as described in U.S. Patent No. 3,982,543). In a continuous dip coating process sutures are generally coated at a rate of about 45-60 feet per minute. Another means of coating sutures is to drip coat a suture using a syringe pump to apply the coating to a moving suture. Sutures can be drip coated at about 44 meters per minute, (described in U.S. Patent No. 5,472,702 column 7, lines 1-20). Coating/filling heads have also been used to coat sutures, such as the filling heads described in U.S. Patent No. 5,447,100. The speed at which sutures are coated using these filling heads is about 50 meters per minute (see column 14, line 58 of U.S. Patent 5,447,100).

Although the coating process that have been conventionally used provide acceptable coatings for sutures, the production speeds at which the coatings are applied are very low. Therefore, it would be a significant contribution to the art of suture production to provide a faster means for coating sutures.

### Summary of the Invention

We have discovered a suture coating apparatus comprising a vessel suitable for containing a coating mixture having an opening suitable for passing a suture through; a first guide means for directing a suture into the coating mixture contained in the vessel; a second guide means positioned in said vessel suitable for redirecting the suture out of the coating mixture; a third

guide means suitable for redirecting a suture through at least about a 90 degree turn; wherein the suture travels at a speed sufficient to remove any excess coating entrained by the suture when it is redirected by the third guide means.

We have discovered a suture coating apparatus comprising a vessel suitable for containing a coating mixture having an opening suitable for passing a suture through; a first guide means for directing a suture into the coating mixture contained in the vessel; a second guide means positioned in said vessel suitable for redirecting the suture out of the coating mixture; a third guide means having a surface which is adjacent to or contacts the suture and forms a meniscus that remove any excess coating entrained by the suture when it is redirected by the third guide means.

We have also discovered a continuous process for coating sutures comprising in a continuous process contacting a suture with a coating mixture (which for the purpose of this invention includes solutions, dispersion, emulsions, suspensions and the like) to provide a wet coated suture; removing the wet coated suture from the coating mixture and completely or partially preventing the excess coating mixture on the wet coated suture from contacting the coating mixture thereby maintaining the coating mixture at a substantially constant concentration; and drying the wet coated suture to provide a coated suture.

In another embodiment of the present invention we have discovered a suture coating head comprising a vessel suitable for containing a coating mixture having an opening suitable for passing a suture through; a first guide means for directing a suture from a substantially vertical downward path to a substantially vertical upward path, said first guide means being positioned in said vessel; and a fluid impermeable diverter being positioned to control fluid communications from a suture as the suture exits the vessel.

### Description of the Figures

Fig. 1 illustrates one embodiment of a coating line suitable for coating a surgical suture.

Fig. 2 illustrates a coating head which is suitable for coating a surgical suture.

Fig. 3 illustrates a cross-section of one embodiment of guide means.

Fig. 4 illustrates an alternative embodiment of the coating head which is suitable for coating a surgical suture.

### Detailed Description

The inventive system for coating sutures is illustrated in Figure 1. As shown in Figure 1 a spool 2 of suture 4 is placed on let off device 6. The suture 4 travels from let off device 6 to the coating head 20 as shown in Fig. 2. The coating head 20 comprises a support 22 to which

are attached a first guide means 30 and second guide means 32 (which as illustrated comprise guide rollers but may include wire loops or pigtails) for directing the suture 4 into the coating mixture 25 contained in vessel 24 and preferably secured in position relative to said vessel 24. The guide rollers are made of a nontoxic non-reactive material which is inert to the solvents employed in the coating mixture. Preferably the guides rollers will be coated with a nonreactive material such as a ceramic, or stainless steel alloy (such as the rollers manufactured by Yuasa of Japan). The first guide means 30 re-direct the suture 4 from a horizontal path to a path which is substantially vertical and downward. The first guide means 30 may be associated with one or more additional guide means (as illustrated in Figure 2 guide roller 28) which reorients the suture to a substantially vertical path. The suture 4 then travels from the first guides means 30 to a second guide means 32 which orients the suture 4 to a substantially vertical path which is upward (which is preferably perpendicular to the surface of the coating mixture). The second guide means 32 may be associated with a third guide means 34. The third guide means 34 may be associated with one or more auxiliary guide means to further reorient the suture such as guide means 36 and 38.

As the suture passes from the guide roller 30 to guide roller 32 it is submerged in coating mixture 25 and is coated with the coating mixture 25 to provide a wet coated suture 5. After the wet coated suture 5 has been reoriented by the guide roller 32 it emerges from the coating mixture 25 as a wet coated suture 5 and is turned through a sharp turn which is designed to generate sufficient centrifugal force to remove the excess coating mixture entrained with the suture. The angle and radius of the turn will vary depending on the composition and density of the coating mixture, the speed that the suture is moving, the viscosity of the coating mixture and the size of the suture. Currently it is preferably for sizes 0 to 8-0 suture that the turn be at least about 120 degree turn by guide means 34 and preferably through at least about 160 degree turn suture (using the preferred calcium stearate, film-forming polymer mixture in ethyl acetate).

Alternatively, the excess coating may be removed from the surface of the suture after it emerges from contacting the coating by positioning a surface in close proximity (adjacent) to the path of the suture or in contact with the suture as it exits the vessel. The surface should be placed close enough to the surface of the suture to form a meniscus with the wet coated suture. The meniscus will facilitate the removal of the excess coating mixture and may have various geometries from a rounded point to a flat surface. In one embodiment of the invention it is proposed to size the guide means 34 with the sides of the guide means 34A and 34B being suitable for forming a meniscus 300 and removing the excess coating mixture as shown in Fig. 3.

Guide means 34 is important for separating the ex-

cess coating mixture from the wet coated suture 5, which substantially prevents an excessive or uneven amount of coating from being deposited on the suture. Guide means 34 reorients the coated suture 5 from a vertical upward path to a path that is substantially vertical and downward. From guide roller 34 the coated suture 5 travels to guide roller 36 which reorients the coated suture 5 into a substantially horizontal path. The coated suture 5 then optionally travels to guide roller 38 which completes the orientation of the coated suture 5 to a substantially horizontal path.

In an another embodiment of the invention when the coated suture 5 emerges from the coating mixture 25, excess coating mixture 25 is entrained with the wet coated suture 5. The excess coating mixture falls off the coated suture 5 as it travels through guide means 34 (as shown in Fig. 2). As the excess mixture drips off the coated suture 5, it is caught by a diverter 40 which partially or completely prevents it from returning to the coating mixture 25 and changing the concentration of the coating mixture 25. Maintaining a substantially constant concentration of solvent to the biocompatible polymer and optionally fatty acid is important to maintaining a uniform suture coating. The coating mixture caught by the diverter 40 may be fed to a reservoir for reconstitution and reuse or disposal. The diverter 40 significantly improves the final suture product by insuring a uniformly coated suture is produced throughout the coating process. The diverter 40 can constitute a plate that completely separates the vessel into an upper and lower section.

Alternatively, some of the coating mixture may be returned to the coating bath to minimize waste. However, the amount returned to coating bath must not be enough to adversely affect the concentration of the coating bath. The drip guard 440 shown in Figure 4 provides a means for returning the excess coating mixture to the coating bath. The drip guard 440 as shown in Fig. 4 has two side members 442 and 444 attached along opposite sides of base 446. The excess coating mixture coming off of the suture at guide means 34 is directed by the drip guard 440 into the diverter. Suture lines without the drip guard 440 drip their excess directly back into the vessel 24 via the same opening in the diverter that provides access to guide means 32. The excess coating mixture not returned to the vessel is directed by diverter plate 450 to drain 452.

Additionally, the guide roller assembly shown in Fig. 2 and Fig. 4 allows sutures to be coated at processing speed of greater than 175 feet per minute and will preferably operate in the range of from about 200 to about 450 feet per minute.

The level of the coating mixture 25 in the vessel 24 is maintained at a constant level and additional coating mixture 25 is supplied by coating reservoir 26 which is in fluid communication with vessel 24 by means of an outlet in the reservoir, a conduit 456 and an inlet 454 in the vessel (as shown in Fig. 4). The vessel 24 and res-

ervoir 26 may be equipped with a temperature controlling means, recirculating means and/or an agitating means to assure the coating mixture remains uniform (such as the magnetic stirring bar 37 shown in vessel 24). The coating mixture level in the vessel 24 may be maintained at a constant level by an automatic feed system which controls the transfer of coating mixture from the reservoir 26 to the vessel 24. A gravity feed system or mechanical system may be used for this purpose. The vessel 24 during operation may be closed or covered with a cover 23 to prevent the solvent in the coating mixture from volatilizing into the air. The cover may also be connected to a vent assembly 41 to remove solvent vapors from the work area. Alternately, the coating assembly may be enclosed in a hood or placed in close proximity to a fume remove vent.

After the wet coated suture 5 leaves the coating head 20, it proceeds to a drying tunnel 44 where the coating mixture is dried on the coated suture 5 and the solvent is substantially removed. The drying tunnel 44 should be maintained at a temperature of from about 20°C to about 125°C, preferably in the range of from about 40°C to about 65°C and most preferably in the range of from about 45°C to 55°C. The drying tunnel 44 should also have a gas flow (filtered air or other inert gas such as, nitrogen, carbon dioxide etc. with a moisture content preferably of less than 30 percent) throughout the tunnel (preferably in the opposite direction of coated suture 5) in an amount sufficient to provide the desired degree of drying in a desired amount of time. Generally the air flow will be in the range of about 25 to about 3000 cu.ft./min., preferably in the range of 5 from about 50 to about 800 cu.ft./min. and most preferably 55 to 75 cu.ft./min. The coated suture 5 will have a residence time in the drying tunnel 44 sufficient to render the suture dry to the touch and remove substantially all the coating mixture solvent. Currently, it is preferred for the coated sutures to reside in the drying tunnel 44 or from about 1 to about 20 seconds and most preferably for from about 3 to about 7 seconds. The amount of time the coated suture 5 is in the drying tunnel can be increased by adding two turning guide such as guide rollers 46 and 48 in the drying tunnel 44 to the allow the suture to traverse the tunnel several times.

The dried suture may then be taken up on a take up spool 64, preferably the suture will first travel through a godet drive 60 to equilibrate the tension on the coated suture 5 and then it will travel to a take up winder 62.

Those skilled in the art will also appreciate that by placing additional spools on the let off device 6 and a plurality of guide means in parallel on frame 22, that several sutures could be simultaneously coated by a single coating head 20. The presence of additional sutures would also require adjustments in the air flow and a take up winder 62 capable of winding multiple spools of sutures. It is currently preferred to coat one to six sutures simultaneously.

Suture coatings generally contain one or more bio-

compatible polymer and optionally other additives such as fatty acid salts or esters. Suitable biocompatible suture coatings that have been suggested in the literature include nonabsorbable materials such as silicone, teflon, beeswax, polybutylate or polyetherimides, as well as, absorbable materials such as homopolymers and copolymers of glycolide, lactide (which includes L-, D-, and meso- forms of lactide and mixtures thereof),  $\epsilon$ -caprolactone, p-dioxanone, trimethylene carbonate, 1,4-dioxepan-2-one, polyalkylene glycols, castor oil derivatives, polyoxaesters, polyoxaamides, copolymers of vinyl acetates with unsaturated carboxylic acids (such as crotonic, acrylic, and methacrylic acids), water soluble or dispersible cellulose derivatives (such as methyl cellulose, hydroxymethyl cellulose and carboxymethyl cellulose); natural gums; ethylene oxide polymers polyacrylamide; collagen; gelatin; polyamino acids; polyvinyl alcohol; absorbable conjugated unsaturated triglycerides such as dehydrated castor oil and mixtures of such polymers. Several of these coatings are described in one or more of the following U.S. Patents 3,527,650 (teflon coatings); 3,942,532 (aliphatic polyesters); 4,105,034 (polyalkylene oxalates); 4,624,256 (poly  $\epsilon$ -caprolactone); 4,791,929 (poly  $\epsilon$ -caprolactone-coglycolide); 4,994,074 (poly  $\epsilon$ -caprolactone-coglycolide); 5,037,950 (polyp-dioxanone-co- $\epsilon$ -caprolactone); 5,102,420 (polyether-co-amides); 5,371,176 (castor oil derivatives); 5,442,032 (homopolymers and copolymers of 1,4-dioxepan-2-one); and 5,464,929 (polyoxaesters) which are all hereby incorporated herein by reference. Particularly preferred are film-forming copolymers of L-lactide and glycolide which contain from about 15 to 85 percent L-lactide, and have an inherent viscosity of from about 0.5 to 2.0 measured as a 0.1 percent mixture in hexafluorisopropanol at 25°C.

The fatty acid salts useful in the coating compositions of the present invention are biocompatible salts of fatty acids including the calcium, magnesium, barium, aluminum, and zinc salts of six carbon and higher fatty acids, particularly those having from about 12 to 22 carbon atoms and mixtures thereof. The calcium salts of stearic, palmitic and oleic acids are particularly preferred for use in the present invention.

The ratio of the polymer and the fatty acid salt in the coating composition may vary depending upon the specific components selected and the particular suture being coated. In general, the preferred ratio of polymer to salt is within the range of 2:1 to 1:2 by weight, although useful compositions are obtained over a wider range of from about 1:4 to 4:1 parts by weight.

With sutures composed of homopolymers or copolymers of lactide and glycolide, the polymers in the coating composition is preferably polylactide or a copolymer of L-lactide and glycolide containing at least about 15 percent L-lactide, and preferably having different solubility characteristics than the suture. For example, a suture made of a lactide-glycolide copolymer containing about 10 percent of lactyl moieties may be coated with

a composition containing, as a biocompatible polymer, a lactide-glycolide copolymer containing about 65 percent of lactyl moieties, which copolymer is more readily soluble in the selected solvent system than the suture material.

The biocompatible polymer in the coating composition may, if desired, be the same composition as the suture provided that precautions are taken to avoid dissolving the suture when the coating composition is applied. This can be done by utilizing a coating composition in which the biocompatible polymer is in mixture at substantially saturation levels and the contact time of the suture with the coating composition is short before the solvent is driven off.

Where the compositions of the suture and the polymers in the coating are identical, and in other instances where the suture material may be subject to some surface dissolution and/or surface swelling or softening by reason of the action of the solvent thereon, there may be a gradual transition between the substrate composition and the coating composition rather than a sharp interface between them. There may also be some weakening of the suture accompanying the application of such coating compositions.

The coating composition may, if desired, also contain components other than those discussed above for other useful purposes including dyes, proteins (such as growth factors), antibiotics, antiseptics, anesthetics and anti-inflammatory agents.

Suitable solvents for these biocompatible polymers are generally volatile organic solvents such as chloroform, toluene, xylene, 1,2,2-trichloroethane and blends thereof. However, preferred are less toxic solvents such as acetone, ethyl acetate, ethyl acetate/ethanol, n-propyl acetate/acetone, isopropyl acetate/ethanol, ethyl acetate/acetone and blends thereof.

Generally, this solvent will constitute from in the range of about 98 to about 80 weight percent of the coating mixture, preferably the solvent will be in the range of from 96 to 85 weight percent and most preferred in the range of from 96 to 90 weight percent (wherein the total weight percent is 100 weight percent).

When the coating contains a lactide and glycolide copolymer and a fatty acid salt or ester it is preferred that the solvent be ethyl acetate, acetone or a combination of solvents. If the solvent system is a combination of ethyl acetate/ethanol, it should contain in the range from about 99 to about 70 weight percent ethyl acetate and preferably in the range from 90 to 80 weight percent ethyl acetate. If the solvent system is a combination of ethyl acetate/acetone, it should contain in the range from about 99 to about 1 weight percent ethyl acetate and preferably from in the range of from 90 to 10 weight percent ethyl acetate. If the solvent system is a combination of n-propyl acetate/acetone, it should contain in the range from about 90 to about 25 weight percent n-propyl acetate and preferably in the range from 80 to 40 weight percent n-propyl acetate. If the solvent system is

a combination of isopropyl acetate/acetone, it should contain in the range from about 65 to about 10 weight percent isopropyl acetate and preferably about 55 to about 10 weight percent isopropyl acetate.

The amount of coating composition applied to the fiber, or the coating add-on, will vary depending upon the construction of the fiber, e.g., the number of filaments and tightness of braid or twist. In general, the coating composition applied to a braid will constitute from about 0.1 to about 10 percent by weight of the coated fiber, but coating composition may range from as little as about 0.05 percent by weight to as much as about 15 percent or higher in some cases. As a practical matter, and for reasons of economy and general performance, it is generally preferred to apply the minimum amount of coating composition consistent with good tie-down performance, and this level of coating is readily determined experimentally for any particular fiber-coating system.

The coatings are applied to any suture material where it is desired to improve fiber lubricity, suture tie-down characteristics, or the like. The coating is particularly useful with synthetic absorbable multifilament sutures such as homopolymers and copolymers of glycolide, lactide (which includes L-, D-, and mesoforms of lactide and mixtures thereof), ε-caprolactone, p-dioxanone, trimethylene carbonate, 1,4-dioxepan-2-one, poly(alkylene oxalate), and mixtures of such polymers with each other and with other compatible absorbable compositions as those described; for example, in U.S. Pat. Nos. 3,636,952 and 2,683,136 which patents are herewith incorporated herein by reference. One suitable suture composition would include copolymers of p-dioxanone, trimethylene carbonate and glycolide and copolymers of lactide and p-dioxanone. Preferred are suture compositions derived from lactide and glycolide sometimes referred to herein as simply homopolymers and copolymers of lactide and glycolide and copolymers of glycolide and ε-caprolactone.

It will be readily appreciated that coatings may likewise be used with good results on absorbable monofilament sutures as well as on nonabsorbable monofilament and multifilament sutures.

Nonabsorbable sutures such as cotton, linen, silk, nylon, polyethylene terephthalate and polyolefins are normally coated with nonabsorbable compositions. Polyolefins are usually of monofilament construction while cotton, linens, silk and polyester are usually of braided, twisted or covered multifilament construction.

The coating mixture usually is applied to the final suture structure in order to provide a substantially continuous coating on at least the outward facing surfaces of the outer-most filaments of the braid. It is understood, however, that the coating mixture may be applied, if desired, to the individual filaments before they are formed into strands or to the individual strands before they are formed into the final suture structure. This invention is not limited as to suture size or composition, but may be

practiced, for example, with sutures from size 9-0 to size 3 and larger, and with other suture materials. In coating multifilament sutures, it is not necessary that every filament within the suture be individually or completely coated.

The improvement in tie-down properties imparted to synthetic absorbable sutures may be determined semi-quantitatively by comparing the feel of coated and uncoated sutures during the act of tying down a single throw knot. Such comparisons are preferably made on both wet and dry sutures since many suture materials have different tie-down properties when tested wet or dry.

#### Claims

1. A process for coating sutures comprising in a continuous process

contacting a suture with an initial coating mixture to provide a wet coated suture;

removing the wet coated suture from the initial coating mixture and preventing at least part of the excess coating mixture on the wet coated suture from contacting the initial coating mixture thereby maintaining the initial coating mixture at a substantially constant concentration; and

drying the wet coated suture to provide a coated suture.

2. The process of claim 1 wherein the initial coating mixture contains a biocompatible polymer selected from the group consisting of homopolymers and copolymers of lactide, glycolide,  $\epsilon$ -caprolactone, p-dioxanone, trimethylene carbonate, methyl substituted derivatives of the methylene carbonate, 1,4 dioxepan-2-one poly(alkylene oxalate) castor oil derivatives, polyoxaester, polyoxaamides, copolymers of vinyl acetates with unsaturated carboxylic acids, water soluble or dispersible cellulose derivatives, natural gums, ethylene oxide polymers, polyacrylamide, collagen, gelatin, polyamino acids, polyvinyl alcohol, absorbable conjugated unsaturated triglycerides and combinations and mixtures thereof.

3. The process of claim 1 wherein the initial coating mixture additionally contains a fatty acid salt having from 12-22 carbon atoms

4. A suture coating apparatus comprising a vessel suitable for containing a coating mixture having an opening suitable for passing at least one suture through; a first guide means for directing at least

one suture along a suture path into a coating mixture contained in the vessel; a second guide means positioned in said vessel suitable for redirecting the suture path out of the coating mixture; a third guide means suitable for redirecting a suture through a sharp turn, wherein the sharp turn is sufficient to remove any excess coating entrained by a suture when the suture path is redirected by the third guide means and a means for controlling fluid communications from the suture path into the vessel.

5. The suture coating apparatus of claim 4 wherein the third guide means is positioned to redirect the suture path after the second guide means through at least about a 120 degree turn.

6. The suture coating apparatus of claim 4 wherein the first guide means is composed of one or more guide rollers positioned to orient the suture path between the first guide means and the second guide means in a substantially vertical and downward path into the vessel.

7. The suture coating apparatus of claim 4 wherein a diverter means is positioned above the vessel and below the third guide means to control the fluid communications into the vessel.

8. A suture coating apparatus comprising a vessel suitable for containing a coating mixture having an opening suitable for passing a suture through; a first guide means for directing a suture into the coating mixture contained in the vessel; a second guide means positioned in said vessel suitable for redirecting the suture out of the coating mixture; a third guide means having a surface which is adjacent to or contacts the suture and forms a meniscus that remove any excess coating entrained by the suture when it is redirected by the third guide means.

9. A suture coating head comprising a vessel suitable for containing a coating mixture having an opening suitable for passing a suture through; a first guide means for directing a suture from a substantially vertical downward path to a substantially vertical upward path, said first guide means being positioned in said vessel; and a fluid impermeable diverter being positioned to control fluid communications from a suture as the suture exits the vessel.

10. A suture coating head comprising

a vessel suitable for containing a coating mixture having a first opening and a second opening suitable for passing a suture through;

a frame to which is attached a first guide means for directing a suture from a substantially hori-



zontal path to a substantially vertical path and  
a second guide means suitable for redirecting  
a suture from a substantially vertical path to a  
substantially horizontal path, said first and sec- 5  
ond guide means being oriented along a linear  
axis, said frame and guides being positioned in  
said vessel;

a fluid impermeable diverter being within the  
vessel and positioned under and along the lin- 10  
ear axis after the second guide dividing the ves-  
sel into an upper and lower section to control  
fluid communications from the upper section to  
the lower section of the vessel in that region of  
the vessel. 15

20

25

30

35


40

45


50

55


FIG. 1

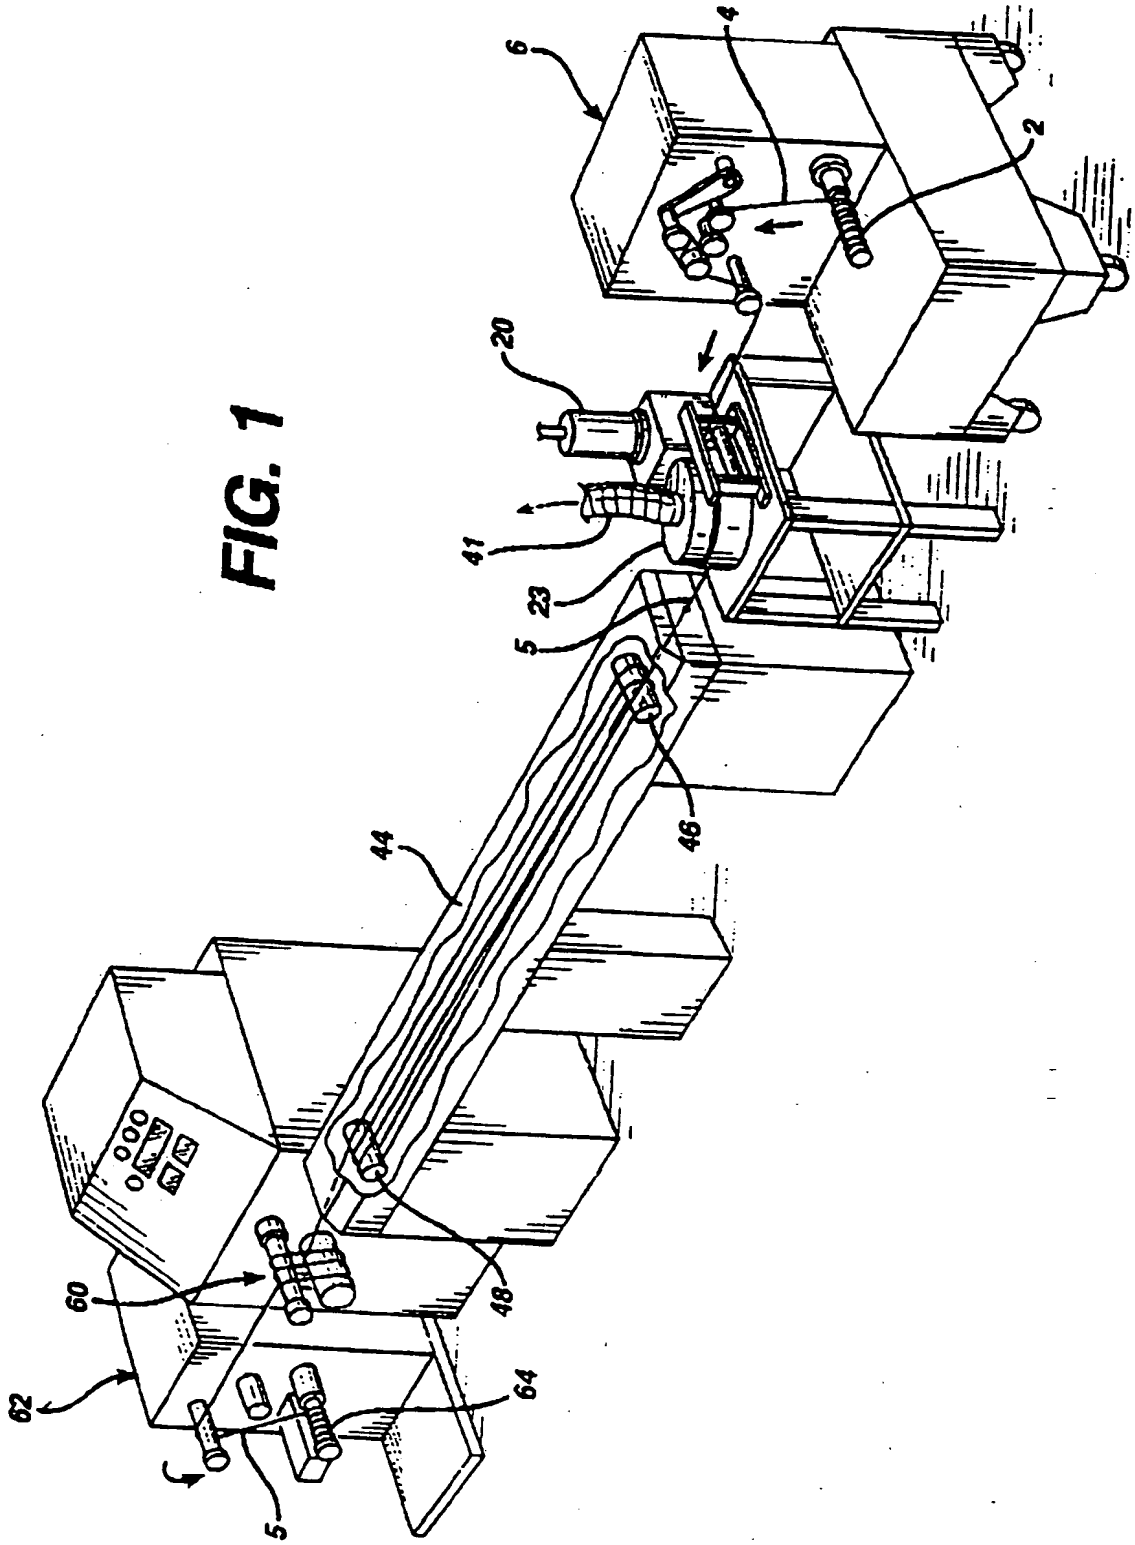

**FIG. 2**

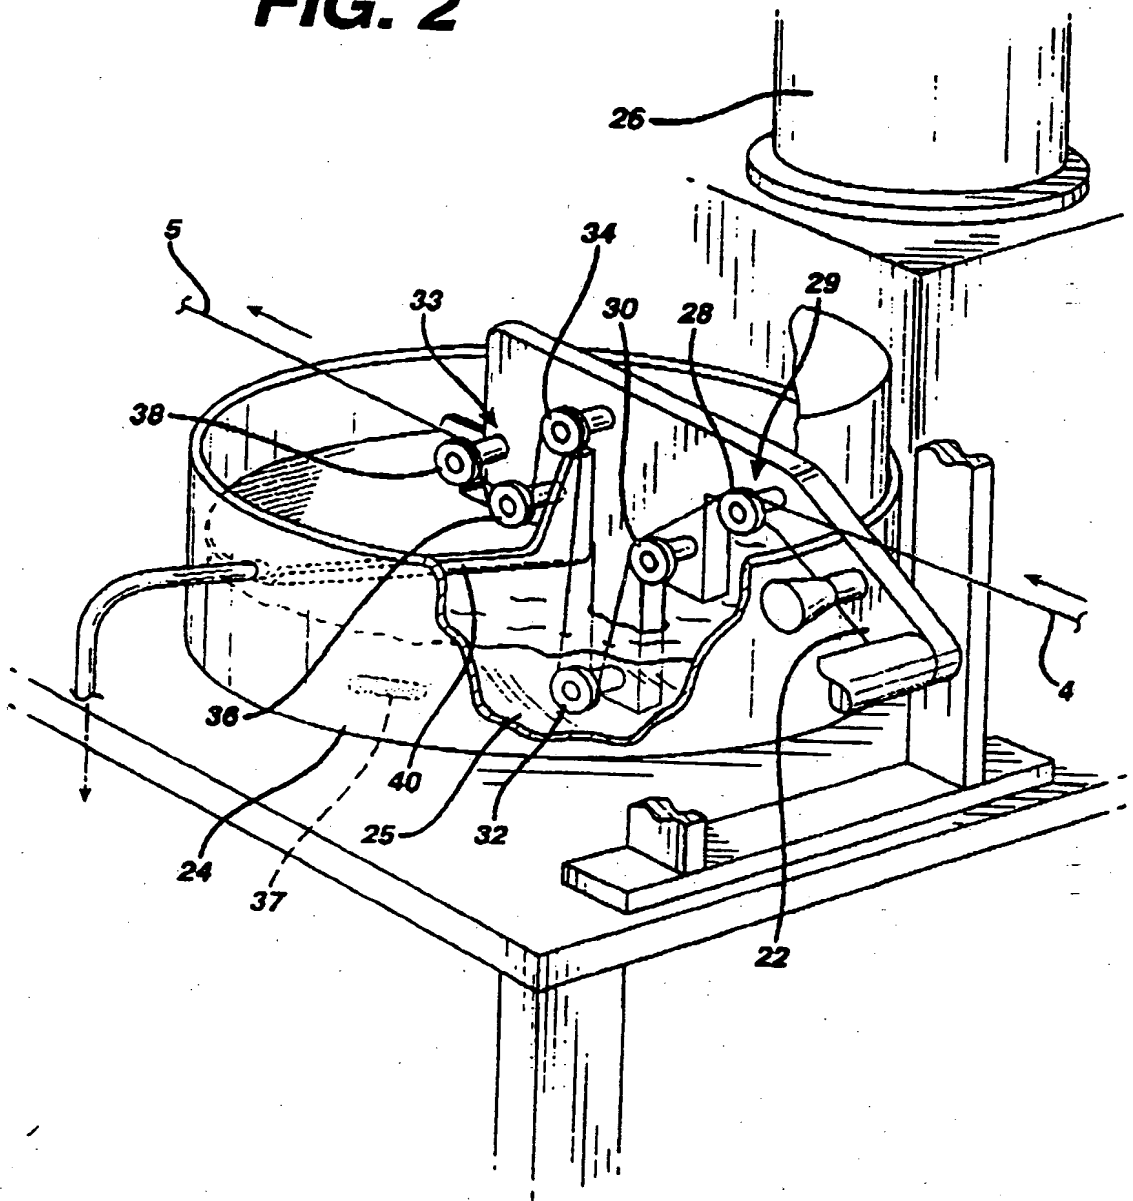

**FIG. 3**

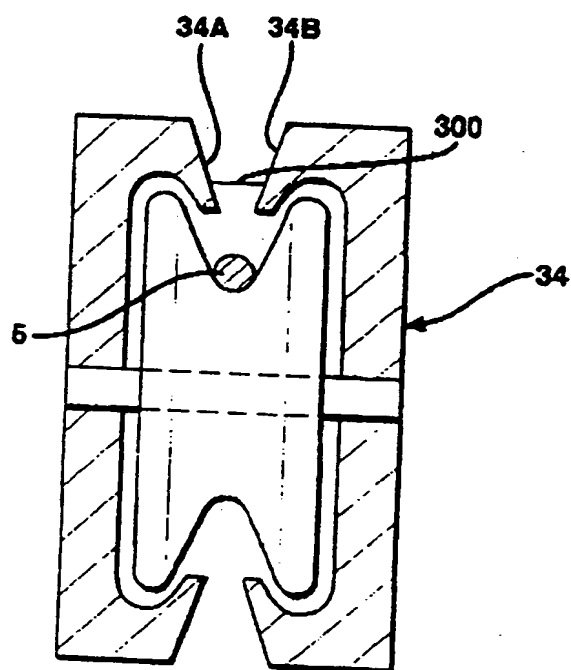

**FIG. 4**

